



IMA Advantage 500L Edgebander

Machine #50377

Key Features


- Tooling: Multi Milling Unit, 2 mm corner rounding unit
- Edgeband Capabilities: 0.5 mm 3 mm coiled edgebanding
- Edging Strips and Lipping: 3 mm 20 mm
- Minimum Edge Tape Height: 12 mm
- Maximum Edge Tape Height: 65 mm
- Minimum Panel Thickness: 8 mm
- Maximum Panel Thickness: 60 mm
- Smallest Workpiece 65 mm x 150 mm (at max panel thickness of 25 mm)
- **Processing Speed:** 14 20 m/min
- Working height: 900 mm
- Operating Voltage: 3PE 60Hz 480V
- Rated Power: 18 kW
- Nominal Current: 39A
- Compressed Air: 7-8 bar





IMA Advantage 500L Edgebander

Machine #50377

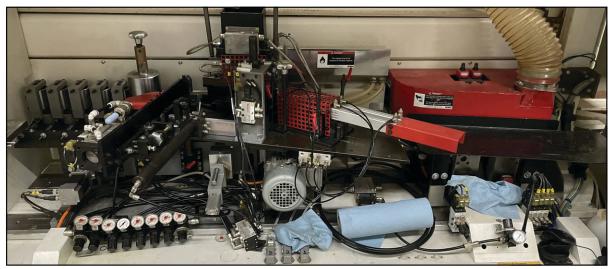









Factory-Certified Refubished Machines

Step 1: Incoming Cleaning and Assessment
Once a machine arrives in our Rebuild
Center, we conduct a thorough cleaning
and evaluate the condition of all components.

Step 2: Assembly and Repairs

Factory-trained technicians assemble the machines and make repairs using genuine IMA and Schelling replacement parts.

Step 3: Restoration to Original Factory Specifications

The machine is restored to its original appearance and performance capability. Equipment is calibrated and thoroughly tested to ensure full functionality to original factory specifications.

Step 4: Certification and Warranty

Every IMA Schelling USA factory-certified refurbished machine comes with a six-month warranty.







